


PARTNER TECH SP-2615® SITE CONTROLLER

Partner Tech SP-2615 Site Controller



The Site Controller is the hardware unit comprising of a CPU, monitor, scanner, and external printer. The Site Controller serves as a Redemption Terminal (RT), Terminal Controller (TC), and Venue Controller (VC).


Site Controller Connections

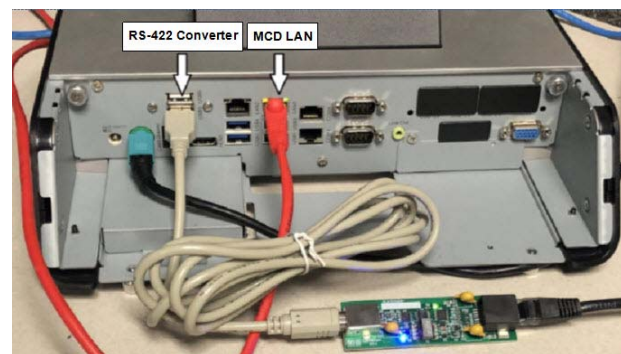

- 1) If MCD is used at establishment, it connects to LAN1.
 - 2) RS-422 connects the EGM to the Site Controller only for those establishments that have D-protocol machines.
- IMPORTANT:**
- A. The 2 ports to the right of LAN1 are not NIC ports, they are COM ports. If ADSL Modem/Router or MCD are connected to one of the COM ports, Site Controller communications will not function as intended.
 - B. The RS-422 converter is connected to one of USB ports of the Partner Tech site controller through a regular USB A Male to USB B Male cable on one side. The other side of the converter is connected to the existing cable that connects all the VLTs.

Sign On

When the TC or VC is disconnected from the RT the *Main Access Home* screen displays.

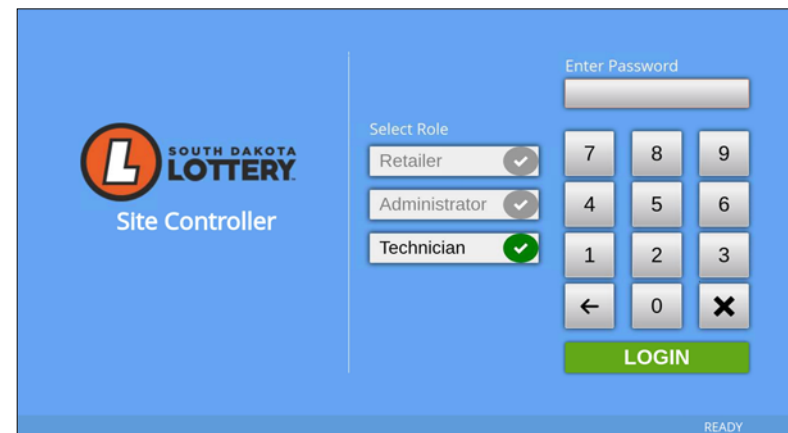

In the *Login Dialog* screen click *Select Role*.

Enter the assigned password. Click **Login** button.

The Retailer password will display *Redeem Voucher* screen on *Retailer Home* screen.

Note: Online QRC Help Logout icons are available on top corner of the screen.



Reprint button prints out only the last redeemed ticket.



Redeeming Ticket

The **Redeem** button enables the operator to redeem cash tickets from SAS/GMMS VLTs. Redemption receipt is printed when a cash ticket is redeemed.


- 1) For SAS ticket, scan the barcode # or enter the 18-digit validation number and then touch **Redeem** button.




- 2) For GMMS ticket, enter the Ticket # and touch **Redeem** button.
- 3) For GMMS tickets, GMMS voucher screen will appear.
- 4) Enter the Permit# and Amount. Then touch **Redeem** button.

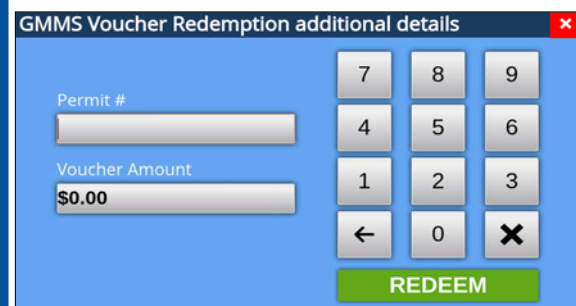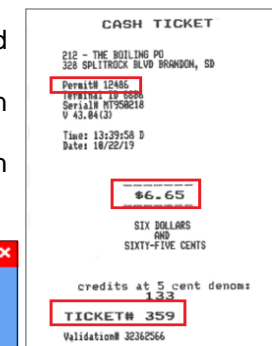

- 5) Once the voucher is redeemed, a receipt will be printed.
- 6) Using the receipt, return the 'Paid Amount' to the customer.

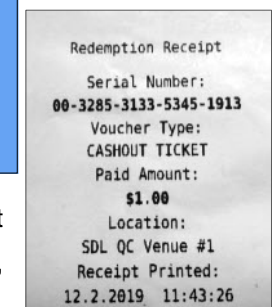


- 7) Repeat the above steps for any additional tickets.
- 8) If the voucher is not redeemable, appropriate error message will be shown.

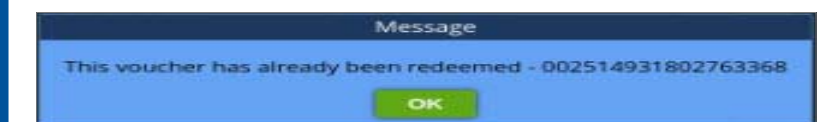

PARTNER TECH SP-2615® SITE CONTROLLER


Administrator Home Screen

The Administrator login displays the *Administrator Home screen*.

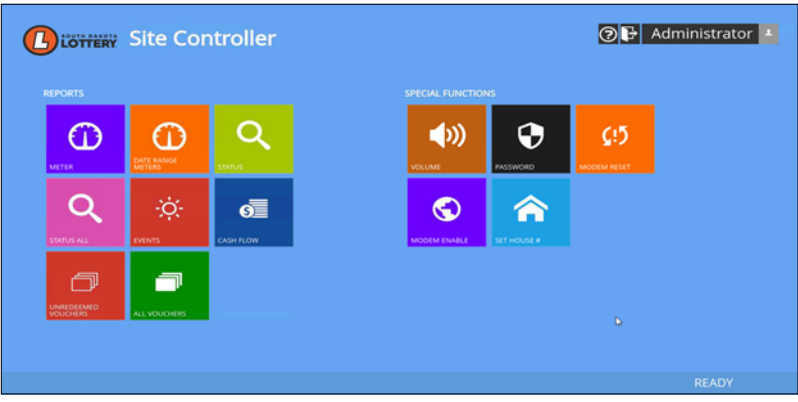

Special Functions

The **Special Functions** icons on the *Administrator Home screen* provides access to functions for the operator and the technician.

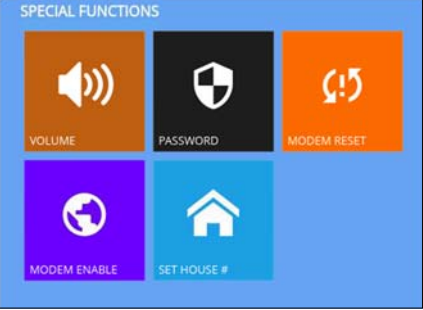


Special Functions	Description
Volume	Adjusts the volume of the terminal
Password	Change/reset passwords
Modem Reset	Resets the modem
Modem Enable	Enable the modem
Set House#	Set own identity # for VLTs (01-99)

Diagnostics (contd.)

The Diagnostics functional options are as below:

Comm Config	Run Script	Copy Logs
Update Terminal	Maintenance	Reboot
Auto Config		

Touch the **Maintenance** icon to display the *Maintenance screen*.

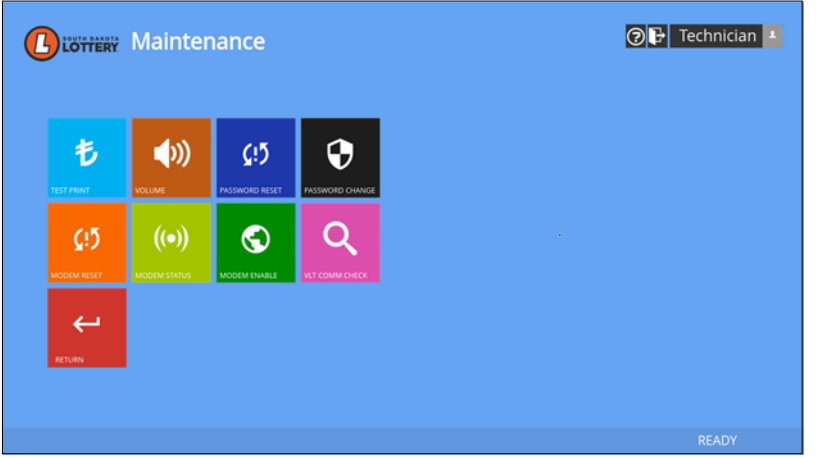

The Maintenance functional options are as below:

Test Ticket	Volume	Password Reset
Password Change	Modem Reset	Modem Status
Modem Enable	VLT COMM Check	Return


Reports

Reports icons are available from the *Administrator Home screen*.

- 1) On the *Reports screen* touch a report name and the *Print Preview* window displays on screen.
- 2) *Select a Machine ID* for a gaming machine to print the selected report.
- 3) The *Print Preview* window displays.
- 4) Touch **Print** to print report.




Permit #	Drop #	House #
77	01	01
4068	02	02
5743	04	03
18502	11	04

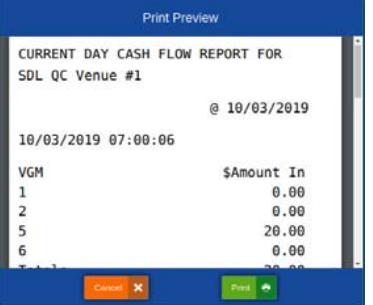

Diagnostics

The *Technician Home Screen* will display the *Diagnostic screen* and the technician *Maintenance screen* can be accessed from there.

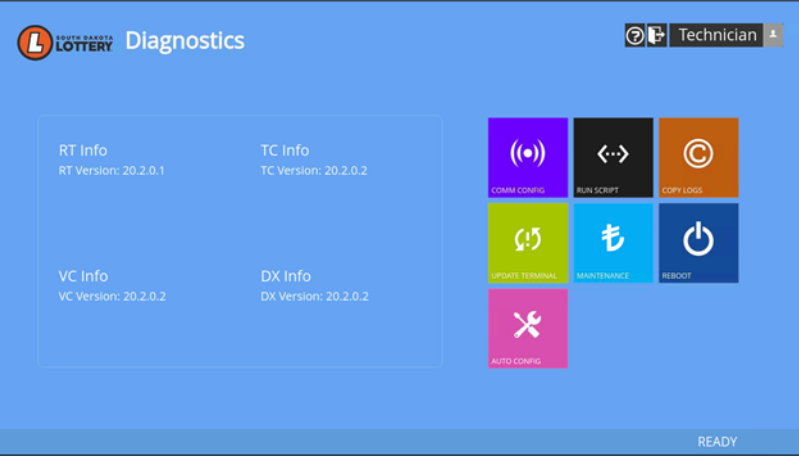

South Dakota Lottery Computer Room
605-773-5793